


ELECTRO-PROPORTIONAL VALVES—DIRECTIONAL CONTROL

SP10-20 Poppet, 2-Way, Normally Closed

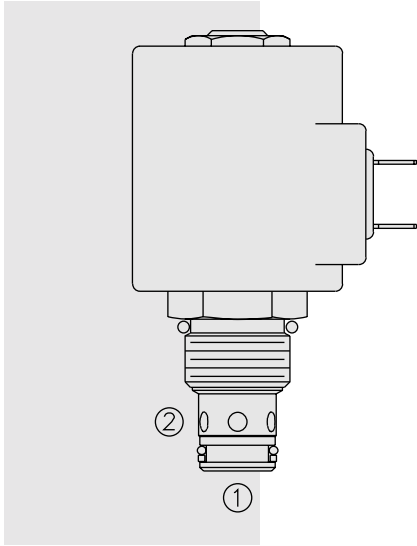

DESCRIPTION

A proportional solenoid-operated, 2-way, poppet-type, normally closed, screw-in hydraulic cartridge valve for low-leakage blocking and load-holding applications.

OPERATION

When de-energized, the **SP10-20** acts as a check valve, allowing flow from ① to ②, while blocking flow from ② to ①. When energized, the poppet lifts to open the ② to ① flow path. Flow is proportional to current applied to the coil.

Note: If low voltage is expected on the machine, 12 or 24 volt systems will require the use of 10 volt or 20 volt coils respectively. See "SP Valves and Coil Operating Parameters," page 2.002.1.

FEATURES

- Industry-common cavity.
- Continuous-duty rated coils.
- Manual override option.
- Efficient wet-armature construction.
- Optional waterproof E-Coils rated up to IP69K.
- Metering Option.

RATINGS

Operating Pressure: 250 bar (3625 psi)

Flow: 68 lpm (18 gpm) at 34.5 bar (500 psid)

Minimum Operating Dither/Pulse Frequency: 70 Hz

Hysteresis: Less than 5% up to 75% of I-max.; Less than 10% above 75% of I-max.

Max. Internal Leakage: 5 drops per minute at 250 bar (3625 psi)

Temperature: -40 to 120°C with standard Buna seals

Filtration: See page 9.010.1

Fluids: Mineral-based or synthetics with lubricating properties at viscosities of 7.4 to 420 cSt (50 to 2000 sus)

Installation: No Restrictions. See page 9.020.1


Cavity: VC10-2; See page 9.108.1; **Cavity Tool:** CT10-2XX; See page 8.600.1

Seal Kit: SK10-2X-T; See page 8.650.1




Coil Nut: Part No. 7004400; for E-coils manuf. prior to 1-1-04, see page 3.400.1.

SYMBOLS


USAS/ISO:



PERFORMANCE

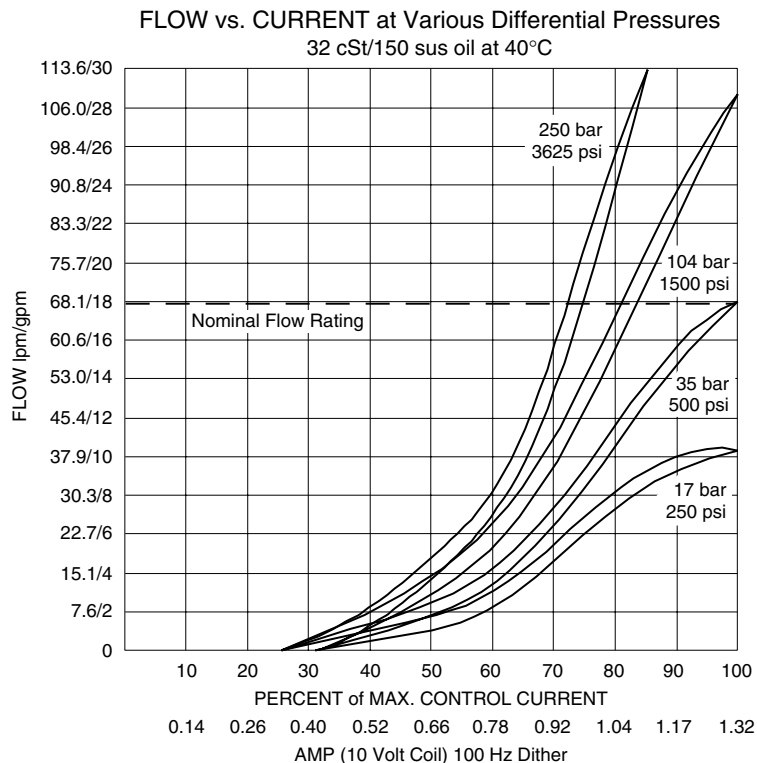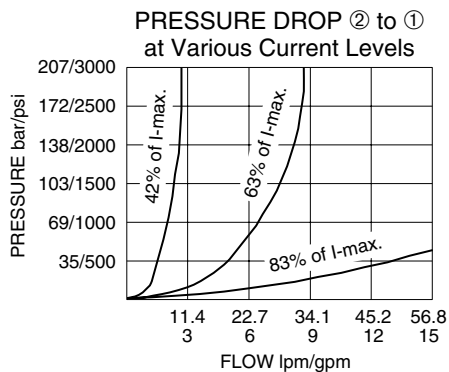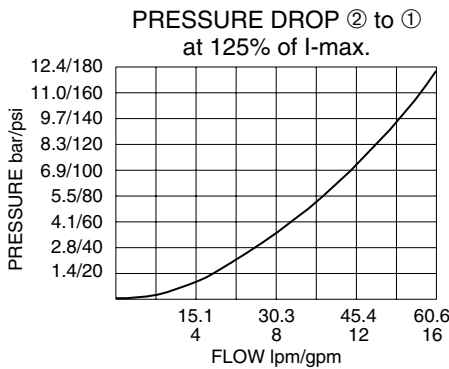

PERFORMANCE (cont'd.)

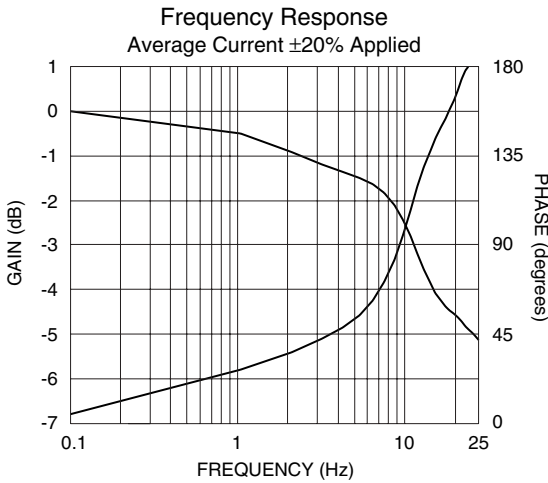


Recommended Controllers (See Section 3)

Input Sig. w/12V Coil	DIN Coil Mount	PCB Board	Metal Box	DIN Rail Mount
0-5 VDC	7114950	4000046	4000049	4000136
0-10 VDC	4000070	4000141	4000124	4000137
4-20 mA PWM	4000123	4000143	4000130	4000139
	—	4000144	4000133	4000140

w/24V Coil				
0-5 VDC	4000161	4000194	4000174	4000136
0-10 VDC	4000165	4000141	4000182	4000137
4-20 mA PWM	4000169	4000143	4000186	4000139
	—	4000144	4000133	4000140

DIMENSIONS

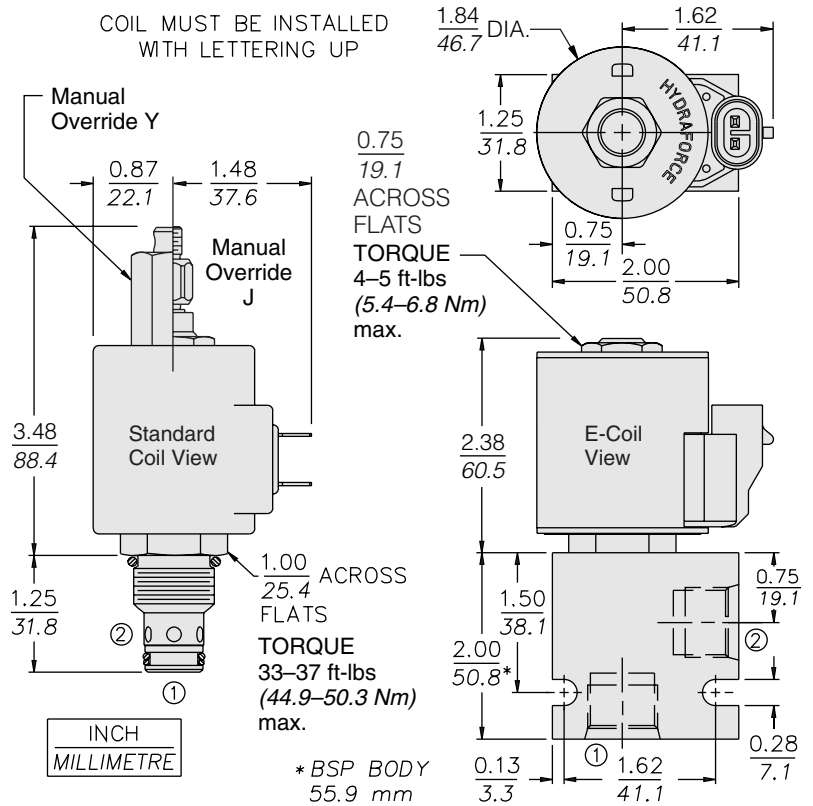

MATERIALS

Cartridge: Weight: 0.16 kg. (0.34 lbs.); Steel with hardened work surfaces. Zinc-plated exposed surfaces; Buna N O-rings and back-ups standard.

Standard Ported Body: Weight: 0.16 kg. (0.35 lbs.); Anodized high-strength 6061 T6 aluminum alloy, rated to 240 bar (3500 psi); See page 8.010.1. Ductile iron and steel bodies available; dimensions may differ; consult factory.

Standard Coil: Weight: 0.27 kg. (0.60 lbs.); Unitized thermoplastic encapsulated, Class H high temperature magnetwire; See page 3.200.1.

E-Coil: Weight: 0.41 kg. (0.9 lbs.); Perfect wound, fully encapsulated with rugged external metal shell; Rated up to IP69K with integral connectors; **Note: See page 3.400.1 for all E-Coil retrofit applications.**

TO ORDER

SP10-20 - - -

Option		Voltage	Termination (VDC) Std. Coil
None (Blank)		0 Less Coil**	DS Dual Spades
Screen	S	10 10 VDC†	DG DIN 43650
Metering	A	12 12 VDC	DL Leadwires (2)
Manual Override	J	20 20 VDC†	DL/W Leads w/Weatherpak® Connectors
Manual Override	Y	24 24 VDC	DR Deutsch DT04-2P
For Manual Override details see page 1.001.1		**Includes Std. Coil Nut	Termination (VDC) E-Coil
Porting		†10 VDC and 20 VDC coils should be used for most continuous-duty applications. Consult factory.	ER Deutsch DT04-2P (IP69K Rated)
Cartridge Only	0		EY Metri-Pack® 150.2A (IP69K Rated)
SAE 6	6T	Seals	
SAE 8	8T	N Buna N (Std.)	Coils with internal diode are available. Consult factory.
1/4 in. BSP*	2B	V Fluorocarbon	
3/8 in. BSP*	3B	P Polyurethane	
1/2 in. BSP*	4B		
*BSP Body; U.K. Mfr. Only			