


ELECTRO-PROPORTIONAL VALVES—FLOW CONTROLS

PV72-31 Proportional Flow Control Cartridge,

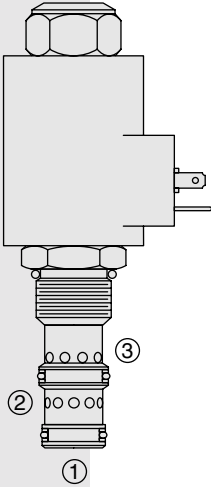

DESCRIPTION

A solenoid operated, electrically-variable, three-port, pressure-compensated, spool-type, normally open when de-energized, proportional flow control valve. It can be used as a priority-type flow regulator with pressure-compensated, regulated and bypass flow. It can also be used as a restrictive-type 2-way, pressure-compensated flow regulator when the bypass line (port ②) is blocked.

OPERATION

The PV72-31 will regulate flow out of port ③ regardless of system working pressure. With an increasing current applied to the solenoid, the PV72-31 will decrease output flow.

Note: When used as a bypass flow control in applications where the priority flow port will be blocked by external valving, bypass pressure drop will increase unless a small amount of leakage is provided for the priority port. Consult factory.

Operation of Manual Override:

To Engage: Turn clockwise approximately 1 turn to reach start point. Continue another approximately 5 turns to full shift.


To Disengage: Turn counterclockwise approximately 6 turns to positive stop.

FEATURES

- Excellent linearity and hysteresis characteristics.
- Hardened spool and cage for long life.
- Efficient wet armature construction.
- Optional coil voltages and terminations.
- Cartridges voltage interchangeable.
- Unitized, molded coil design.
- Coil waterproofing standard.
- Manual override option.

SYMBOLS

USASI/ISO:



RATINGS

Operating Pressure: Port ①: 240 bar (3500 psi); Ports ② and ③: 207 bar (3000 psi)

Regulated Flow Rate in 3-Port Mode: Range A: 53 lpm (14 gpm)
Range B: 38 lpm (10 gpm)

Maximum Input Flow in 3-Port Mode: Range A and B: 114 lpm (30 gpm)

Maximum Flow Rate in 2-Port Mode: Range A: 42 lpm (11 gpm)
Range B: 31 lpm (8 gpm)

Note: For increased flow capacity in a 2-port flow control, see model PV72-21

Internal Leakage: .38 lpm (0.1 gpm) fully closed at 207 bar (3000 psi)

Electrical: 2 standard voltage ratings

Coil Voltage	Threshold Current	Max. Control Current
12 VDC	150 ± 100 mA	1350 ± 150 mA
24 VDC	75 ± 50 mA	675 ± 75 mA

Filtration: See page 9.010.1



Fluids: Mineral-based or synthetics with lubricating properties at viscosities of 7.4 to 420 cSt (50 to 2000 ssu)

Installation: No restrictions; See page 9.020.1.

Cavity: VC12-3; See page 9.112.1; **Cavity Tool:** CT12-3X-XX; See page 8.600.1

Seal Kit: SK12-3X-MM; See page 8.650.1

PERFORMANCE

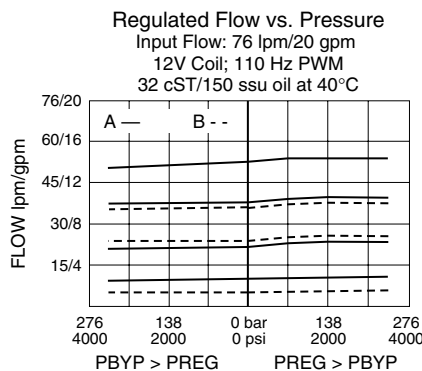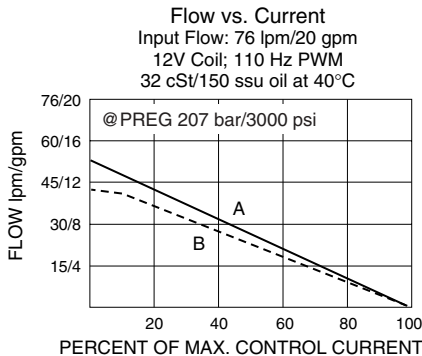


Recommended Controllers (See Section 3)

Input Sig. w/12V Coil	DIN Coil Mount	PCB Board	Metal Box	DIN Rail Mount
0-5 VDC	7114950	4000046	4000049	4000136
0-10 VDC	4000070	4000141	4000124	4000137
4-20 mA	4000123	4000143	4000130	4000139
PWM	—	4000144	4000133	4000140
w/24V Coil				
0-5 VDC	4000161	4000194	4000174	4000136
0-10 VDC	4000165	4000141	4000182	4000137
4-20 mA	4000169	4000143	4000186	4000139
PWM	—	4000144	4000133	4000140

Normally Open

PV72-31

DIMENSIONS

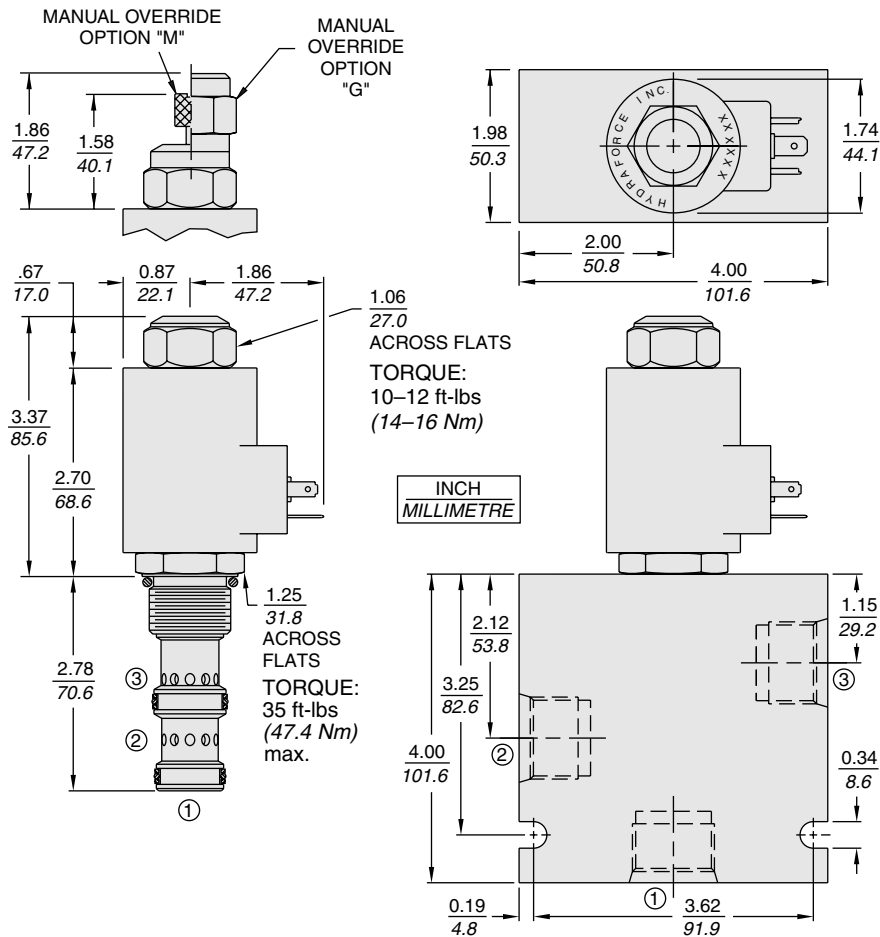

MATERIALS

Cartridge: Weight: 0.36 kg. (0.8 lbs.); Steel with hardened work surfaces. Zinc-plated exposed surfaces. Buna N O-rings and polyester elastomer back-ups standard.

Standard Ported Body: Weight: 1.09 kg. (2.4 lbs.); Anodized high-strength 6061 T6 aluminum alloy, rated to 240 bar (3500 psi); See page 8.012.1. Steel and Ductile Iron bodies available; dimensions may differ; consult factory.

Coil: Weight: 0.32 kg. (0.7 lbs.); Unitized thermoplastic encapsulated, Class H high temperature magnet-wire; See page 3.200.1.

TO ORDER

