



SOLENOID VALVES

SV10-25 Spool, 2-Way, Normally Open

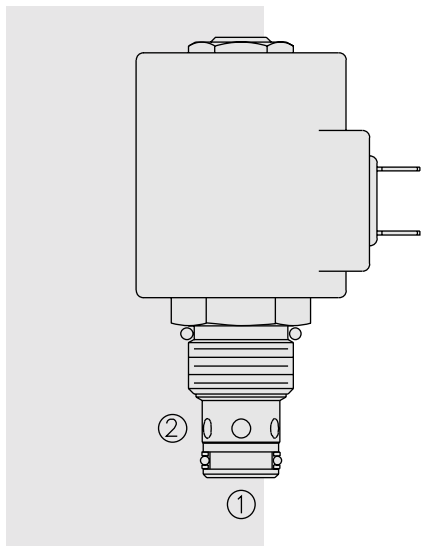


SYMBOLS

USASI/ISO:



PERFORMANCE (Cartridge Only)

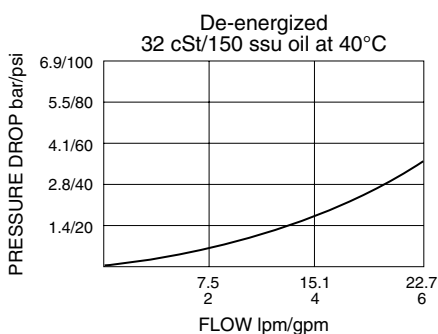

DESCRIPTION

A solenoid-operated, 2-way, normally open, direct-acting, spool-type, screw-in hydraulic cartridge valve, designed to function as a bidirectional blocking valve.

OPERATION

When de-energized, the **SV10-25** allows flow in both directions.

When energized, the cartridge's spool shifts to close the bidirectional flow path.

Operation of Manual Override Option: To override, push button in and twist counterclockwise 180°. The internal spring will push the button out. In this position, the valve may be only partially shifted. To assure full override shift, pull the button out to its fullest extension and hold it in this position.

To return to normal valve function, push button in, twist clockwise 180° and release. Override will be detented in this position.

FEATURES

- Continuous-duty rated solenoid.
- Hardened precision spool and cage for long life.
- Optional coil voltages and terminations.
- Both ports may be fully pressurized.
- Efficient wet-armature construction.
- Cartridges are voltage interchangeable.
- Manual override option.
- Optional waterproof E-Coils rated up to IP69K.
- Unitized, molded coil design.
- Industry common cavity.

RATINGS

Operating Pressure: 207 bar (3000 psi)

Proof Pressure: 350 bar (5075 psi)

Flow: Inlet at port ①: 18.9 lpm (5 gpm) max; Inlet at port ②: 22.7 lpm (6 gpm) max.

Internal Leakage: 82 cc/minute (5 cu. in./minute) max. at 207 bar (3000 psi)

Temperature: -40 to 120°C with standard Buna seals

Coil Duty Rating: Continuous from 85% to 115% of nominal voltage

Response Time: First indication of change of state with 100% voltage supplied at 80% of nominal flow rating: Energized: 60 msec.; De-energized: 60 msec.

Initial Coil Current Draw at 20°C: Standard Coil: 1.67 amps at 12 VDC; 0.18 amps at 115 VAC (full wave rectified). E-Coil: 2.0 amps at 12 VDC; 1.0 amps at 24 VDC

Minimum Pull-in Voltage: 85% of nominal at 207 bar (3000 psi)

Filtration: See page 9.010.1

Fluids: Mineral-based or synthetics with lubricating properties at viscosities of 7.4 to 420 cSt (50 to 2000 ssu)

Installation: No restrictions; See page 9.020.1

Cavity: VC10-2; See page 9.110.1


Cavity Tool: CT10-2XX; See page 8.600.1

Seal Kit: SK10-2X-M; See page 8.650.1

Coil Nut: Part No. 7004400;

For E-coils manufactured prior to 1-1-04, see page 3.400.1 for coil nut info.

DIMENSIONS

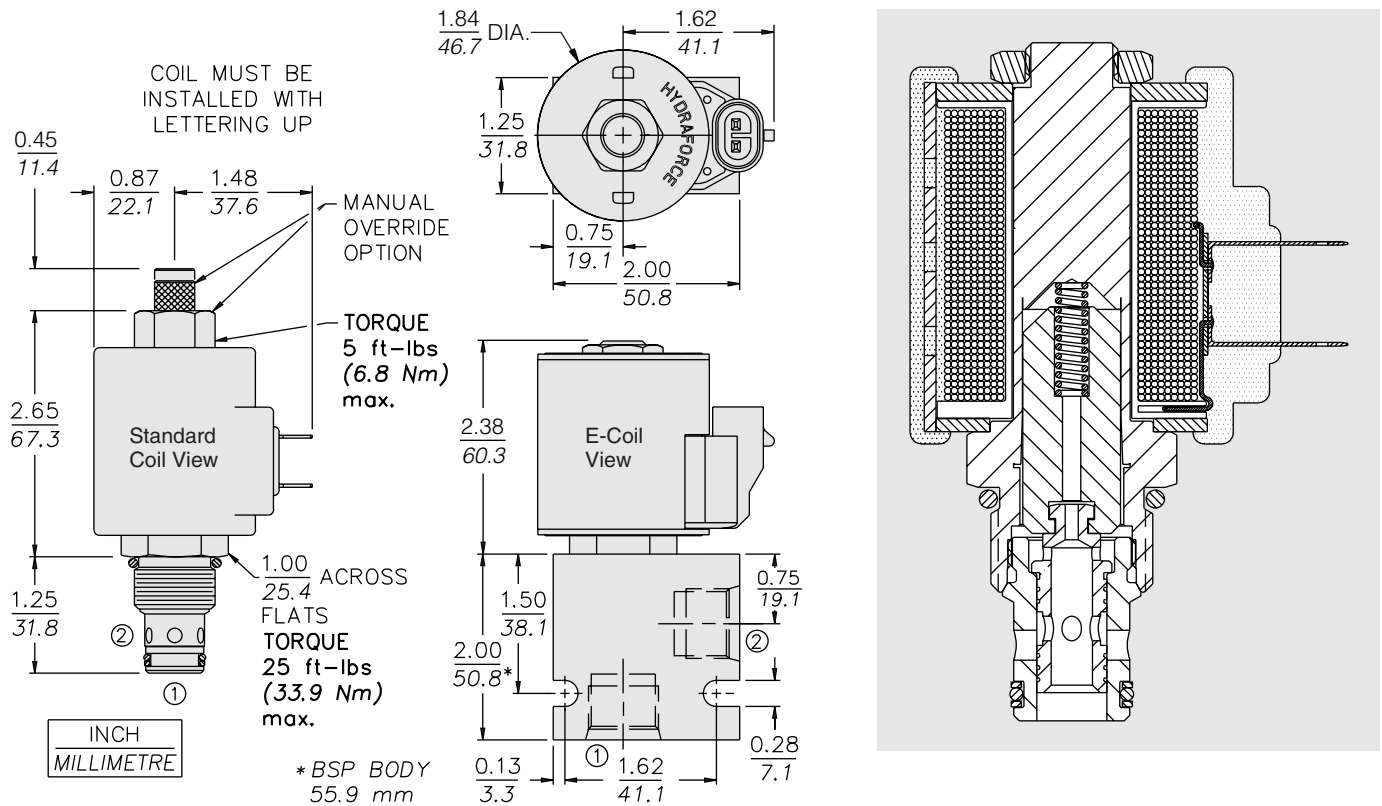

MATERIALS

Cartridge: Weight: 0.16 kg. (0.35 lbs.); Steel with hardened work surfaces. Zinc-plated exposed surfaces. Buna N O-rings and polyester elastomer back-up standard.

Standard Ported Body: Weight: 0.16 kg. (0.35 lbs.); Anodized high-strength 6061 T6 aluminum alloy, rated to 240 bar (3500 psi); See page 8.010.1. Ductile iron and steel bodies available; dimensions may differ; consult factory.

Standard Coil: Weight: 0.27 kg. (0.60 lbs.); Unitized thermoplastic encapsulated, Class H high temperature magnetwire; See page 3.200.1.

E-Coil: Weight: 0.41 kg. (0.9 lbs.); Fully encapsulated with rugged external metal shell; Rated up to IP69K with integral connectors; **Note: See page 3.400.1 for all E-Coil retrofit applications.**

TO ORDER

SV10-25

Option		Voltage		Termination (VDC)
None	(Blank)	Std. Coil		Std. Coil
Manual Override	M	0	Less Coil**	DS Dual Spades
Manual Override	Y	10	10 VDC†	DG DIN 43650
Manual Override	J	12	12 VDC	DL Leadwires (2)
For Manual Override options see page 1.001.1		24	24 VDC	DL/W Leads w/Weatherpak® Connectors
Porting		36	36 VDC	DR Deutsch DT04-2P
Cartridge Only	0	48	48 VDC	Termination (VAC)
SAE 6	6T	24	24 VAC	Std. Coil
SAE 8	8T	115	115 VAC	AG DIN 43650
1/4 in. BSP*	2B	230	230 VAC	AP 1/2 in. Conduit
3/8 in. BSP*	3B	**Includes Std. Coil Nut		Termination (VDC)
1/2 in. BSP*	4B	† DS, DW or DL terminations only		E-Coil
*BSP Body; U.K. Mfr. Only		E-Coil		ER Deutsch DT04-2P (IP69K Rated)
Seals		10	10 VDC	EY Metri-Pack® 150 (IP69K Rated)
Buna N (Std.)	N	12	12 VDC	
Fluorocarbon	V	20	20 VDC	
		24	24 VDC	

Coils with internal diode are available. Consult factory.